


Installation Manual

P-2655
AMK OES AIR SUSPENSION COMPRESSOR
FOR 2007-2013 BMW X5 (E70 CHASSIS)
FOR 2009-PRESENT BMW X6 (E71 CHASSIS)

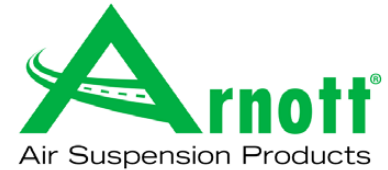

Congratulations on your purchase of an Arnett® air suspension product. We at Arnett Incorporated are proud to offer a high quality product at the industry's most competitive pricing. Thank you for your confidence in us and our product.

Proper installation is essential to experience and appreciate the benefits of this system. Please take a moment to review these installation instructions before you begin to install these components on your vehicle. The removal and installation of air suspension products should only be performed by a fully qualified, ASE Certified, professional.

It is equally important to be aware of all necessary safety measures while installing your new Air Suspension System. This includes proper lifting and immobilizing of the vehicle and isolation of any stored energy to prevent personal injury or property damage.

"Engineered to Ride, Built to Last®"



WARNING: *The air suspension system is under pressure (up to 10 bar, or 150 lbf/in). Verify pressure has been relieved and disconnect power to the air suspension system prior to disassembly. Do not allow dirt or grease to enter the system. Always wear standard hand, ear, and eye protection when servicing the air suspension system.*

KIT CONTAINS:

PARTS LIST

P/N	QTY	DESCRIPTION
21-7203	1	AMK OES AIR SUSPENSION COMPRESSOR
21-7204	1	ACCESSORY KIT

Arnett® is committed to the quality of its products. If you have a question or problem with any Arnett product, please contact Arnett by calling **800-251-8993** during normal business hours or email techassistance@arnottinc.com.

GENERAL INFORMATION:

Reading this manual signifies your agreement to the terms of the general release, waiver of liability, and hold harmless agreement, the full text of which is available at www.arnottinc.com.

- Not to be stored below 5°F (-15°C) or above 122°F (50°C).
- Avoid damage to air lines and cables.
- Removal and installation is only to be performed by fully qualified personnel.
- Use car manufacturer's diagnostic software.

CAUTION: Damage to the vehicle and air suspension system can be incurred if work is carried out in a manner other than specified in the instructions or in a different sequence.



To avoid the possibility of short circuits while working with electric components consult your owner's manual on how to disconnect your battery.



Consult your vehicle owner's manual, service manual, or car dealer for the correct jacking points on your vehicle and for additional care, safety and maintenance instructions. Under no circumstances should any work be completed underneath the vehicle if it is not adequately supported, as serious injuries and death can occur.

AIR SUSPENSION COMPRESSOR ASSEMBLY REMOVAL

1. SET STEERING TO STRAIGHT AHEAD.
2. RAISE VEHICLE.
3. REMOVE THE FASTENERS AND PANELING UNDER THE RIGHT SIDE OF THE VEHICLE TO EXPOSE THE VEHICLES AIR SUSPENSION VALVE BLOCK. (FIGURE 10-1)



FIGURE 10-1

4. LOCATE AND REMOVE THE THREE (3) ELECTRICAL CONNECTORS ON THE COMPRESSOR/VALVE BLOCK ASSEMBLY. (FIGURE 10-2)

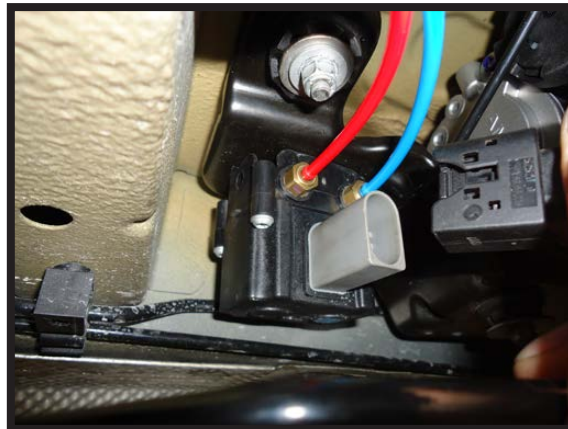


FIGURE 10-2

5. LOCATE AND REMOVE THE TWO (2) AIR LINES LEADING TO THE VALVE BLOCK. (FIGURE 10-3)



FIGURE 10-3

6. LOCATE AND DISCONNECT THE FITTING ON THE LARGER RUBBER HOSE THAT RUNS FORWARD FROM THE COMPRESSOR. (FIGURE 10-4)



FIGURE 10-4

7. LOOSEN AND REMOVE THE HARDWARE HOLDING THE BRACKETS FOR THE FOUR (4) BLACK TUBES RUNNING DIRECTLY UNDERNEATH THE COMPRESSOR. (FIGURE 10-5)

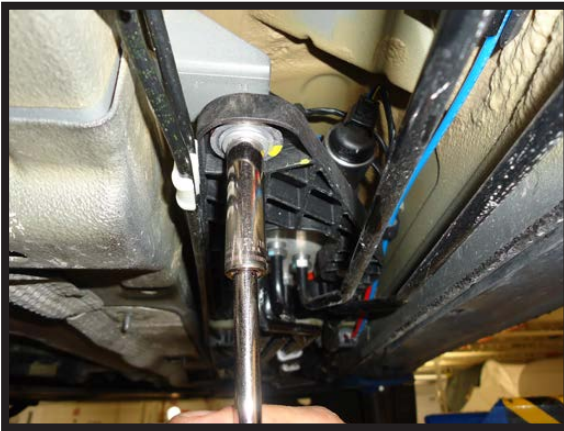


FIGURE 10-5

8. LOCATE AND REMOVE THE THREE (3) NUTS HOLDING THE COMPRESSOR ASSEMBLY TO THE VEHICLE. (FIGURE 10-6)

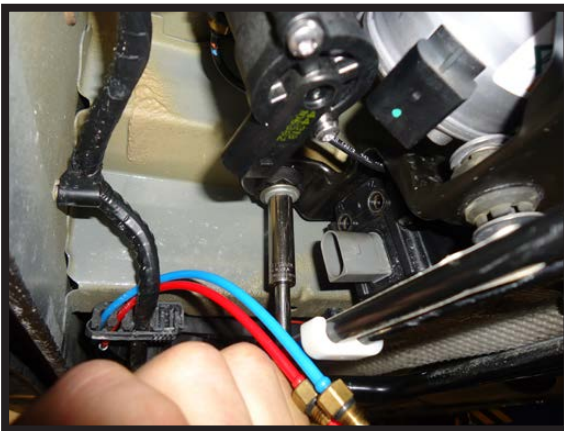


FIGURE 10-6

9. REMOVE THE COMPRESSOR ASSEMBLY FROM THE VEHICLE. (FIGURE 10-7)



FIGURE 10-7

AIR SUSPENSION COMPRESSOR REMOVAL

1. REMOVE THE AIR LINE ON THE COMPRESSOR. REMOVE THE AIR LINE FITTING FROM THE AIR LINE AND DISCARD. (FIGURE 20-1)



FIGURE 20-1

2. REMOVE THE THREE (3) NUTS HOLDING THE COMPRESSOR TO THE MOUNTING BRACKET. (FIGURE 20-2)



FIGURE 20-2

3. REMOVE THE COMPRESSOR FROM THE MOUNTING BRACKET. REMOVE THE LARGER RUBBER HOSE AND THREE (3) MOUNTING STUDS AND INSTALL THEM ONTO THE NEW COMPRESSOR. (FIGURE 20-3)



FIGURE 20-3

4. REMOVAL COMPLETE.

AIR SUSPENSION COMPRESSOR INSTALLATION



Tighten all nuts and bolts to manufacturer's specifications during the installation process.

1. INSTALL THE NEW COMPRESSOR ONTO THE VEHICLE IN THE REVERSE ORDER OF REMOVAL USING EXISTING HARDWARE.



Do not remove the air fitting from the air suspension compressor. Doing so may cause damage and/or void warranty. Remove the white shipping pin from the air new air fitting and insert the air line until fully secure.

AIR SUSPENSION COMPRESSOR ASSEMBLY INSTALLATION



Tighten all nuts and bolts to manufacturer's specifications during the installation process.

1. INSTALL THE COMPRESSOR ASSEMBLY BACK INTO THE VEHICLE IN THE REVERSE ORDER OF REMOVAL.



WARNING



CRACKED AIR SPRINGS MUST BE CHANGED TO VALIDATE THE WARRANTY ON THE COMPRESSOR

PLEASE READ ADDITIONAL WARRANTY INFORMATION ON THE BACK OF YOUR INVOICE



PROPER PROCEDURE FOR ASSESSING YOUR AIR SPRINGS CONDITION:

1. TURN OFF AIR SUSPENSION SWITCH IF EQUIPPED.
2. REFER TO OWNER'S MANUAL FOR PROPER LIFTING TECHNIQUES AND JACKING POINTS.
3. RAISE THE VEHICLE.
4. INSPECT AIR SPRINGS FOR ANY TYPE OF CRACKS OR EXCESSIVE WEAR. CRACKS IN AIR SPRINGS ARE EVIDENT IF THEY ARE LEAKING. THIS WILL CAUSE THE COMPRESSOR TO OVERHEAT AND FAIL FROM CONTINUOUS OPERATION.

REFER TO ARNOTT PART NUMBER:

A-2642 (LEFT OR RIGHT REPLACEMENT REAR AIR SPRING FOR 07-13 BMW X5/09-13 BMW X6)

* IT IS RECOMMENDED THAT YOU REPLACE YOUR BMW X5/X6 AIR SPRINGS IN PAIRS.

Arnett[®] is committed to the quality of its products. If you have a question or problem with any Arnett product, please contact Arnett by calling **800-251-8993** during normal business hours or email techassistance@arnottinc.com